


Specifications

Current Rating: 3A AC,DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Temperature Range: -55°C ~ +105°C






Material

Insulator: P.B.T, UL94V-0
 Contact: Brass
 Cable: Pitch 1.27mm Flat Cable


ORDER INFORMATION

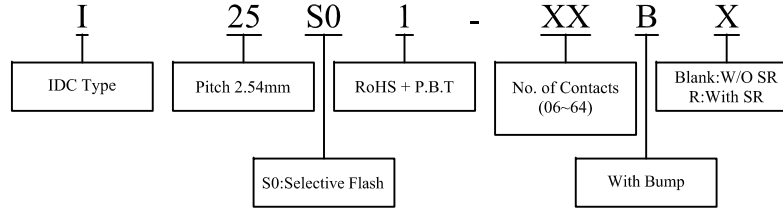


www.esto-gruppe.com

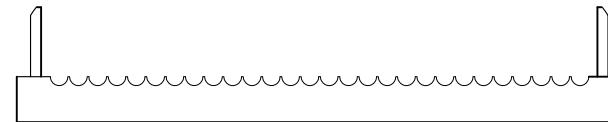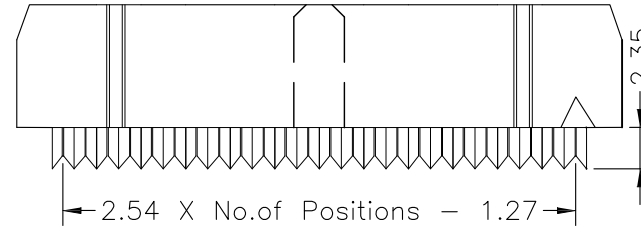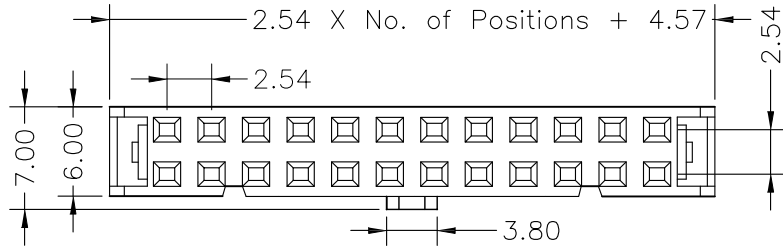

Strain Relife



			 <p>Morecrafts Tel: +886-2-2966-1326 Fax: +886-2-2966-1352</p>	品號 PART NO.	I25S01-XXBX	日期 DATA	2007/01/19			
				圖號 DRAWING NO.	I25S01-XXBX	繪圖 DRAWN	Sayid			
				客戶品號 CUSTOMER P/N		核對 APPROVED	Max			
REV.	DESCRIPTION	DATA	TITLE: IDC Socket 2.54mm	REV. A	公差 TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	單位 UNIT	mm