
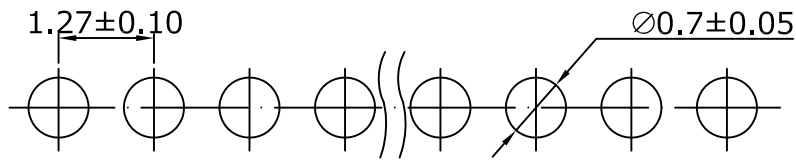


### SPECIFICATIONS


Current Rating: 1A  
 Contact Resistance: 20m Ω Max  
 Insulation Resistance: 1000M Ω Min  
 Withstanding Voltage: 500V AC for 1 minute  
 Temperature Range: -40°C to +105°C  
 Contact: Phosphor Bronze, Gold plated  
 Insulator: NY6T+30%G.F., UL94V-0

### ORDER INFORMATION

M	L	12	34	X	2	-	1	XX
Straight type		Height=3.4mm		NY6T		No. of Contacts Per Row		
Pitch 1.27mm		G0:Gold Flash		S0:Selective Flash		Single Row		
		G1:Gold 3u"		S1:Selective 3u"				
		G2:Gold 5u"		S2:Selective 5u"				
		G3:Gold 10u"		S3:Selective 10u"				
		G4:Gold 15u"		S4:Selective 15u"				
		G5:Gold 30u"		S5:Selective 30u"				

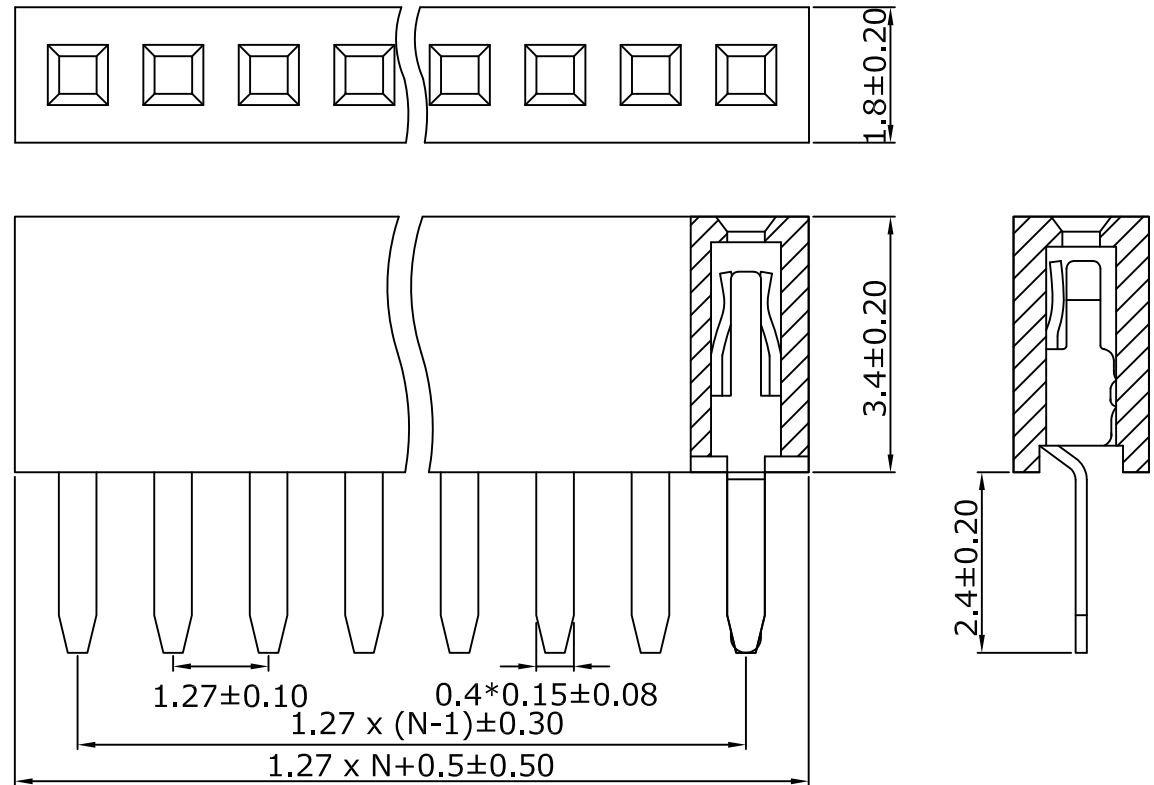

Recommended PCB Layout

 Morecrafts Technology TEL: +886-2-2966-1326 FAX: +886-2-2966-1352 www.morecrafts.com.tw	PART NO.	ML1234X2-1XX	DRAWN	Andrew
	DRAWING NO.	ML1234X2-1XX	CHECKED	Claudia
	DATE	2019/02/25	APPROVED	Brian
TITLE:	REV.	TOLERANCE	SCALE	UNIT
Female Header 1.27mm H=3.4mm	A0	.X $\pm 0.25$ .XX $\pm 0.20$	1:1	mm