


SF__-7,62-P

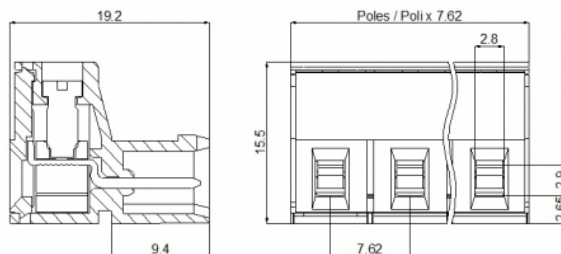

GENERAL INFORMATION

pitch	7,62 mm
Height	15.5 mm
Depth	19.2 mm
Dimensional class	Media
Wire section	2.5 mm ² / 14 AWG
Clamp opening size	2.8 x 2.9 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	500 V
impulse voltage	6 kV

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



			UL 1059
Current	-	-	22 A factory / 20 A field
Voltage	-	-	300 V
Wire section	-	-	12 AWG
Torque	-	-	4.5 Nm
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Nickel-plated copper alloy
SCIP Number	e27c55ac-423d-4d46-808e-20cdb05c39b8

COLOURS

Standard

On request



POLES	NAME	3D FILE
02	SF02-7,62-P	File not available for this product
03	SF03-7,62-P	File not available for this product
04	SF04-7,62-P	File not available for this product
05	SF05-7,62-P	File not available for this product
06	SF06-7,62-P	File not available for this product
07	SF07-7,62-P	File not available for this product
08	SF08-7,62-P	File not available for this product
09	SF09-7,62-P	File not available for this product
10	SF10-7,62-P	File not available for this product
11	SF11-7,62-P	File not available for this product
12	SF12-7,62-P	File not available for this product
13	SF13-7,62-P	File not available for this product
14	SF14-7,62-P	File not available for this product
15	SF15-7,62-P	File not available for this product
16	SF16-7,62-P	File not available for this product