





SPECIFICATIONS

Current Rating: 2Amps
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 500V AC for 1 minute
 Temperature Range: -40°C to +105°C
 Terminal : Phosphor Bronze
 Material: NY6T+30%G.F., UL94V-0

ORDER INFORMATION

M	R	20	43	B	X	2	-	1	XX
Right Angle Type		Height=4.3mm		NY6Y		No. of Contacts Per Row			
Pitch 2.00mm		G0:Gold Flash		S0:Selective Flash		Single Row			
		G1:Gold 3u"		S1:Selective 3u"					
		G2:Gold 5u"		S2:Selective 5u"					
		G3:Gold 10u"		S3:Selective 10u"					
		G4:Gold 15u"		S4:Selective 15u"					
		G5:Gold 30u"		S5:Selective 30u"					

www.esto-gruppe.com

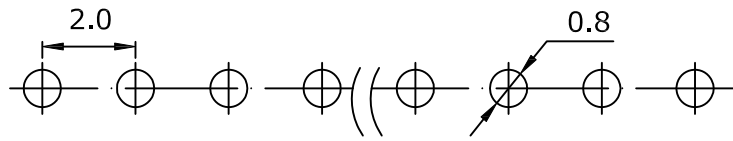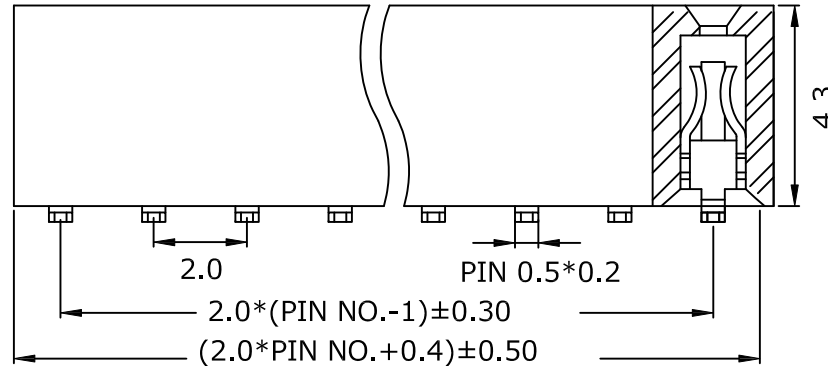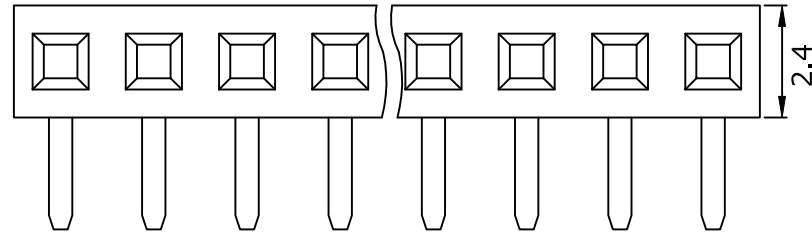

Recommended P.C.B. Layout

M Morecrafts Technology
 TEL: +886-2-2966-1326
 FAX: +886-2-2966-1352
 www.morecrafts.com.tw

PART NO.	MR2043BX2-1XX	DRAWN	Andrew
DRAWING NO.	MR2043BX2-1XX	CHECKED	Claudia
DATE	2015/09/04	APPROVED	Brian

TITLE:	Female Header 2.0mm H=4.3mm	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm
--------	-----------------------------	------	----	-----------	-----------------------	-------	-----	------	----