

**SPECIFICATION**


Current Rating: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -25°C to +85 °C


**MATERIAL**

Insulator: P.B.T, UL94V-0  
 Contact Pin: Copper Alloy

**ORDER INFORMATION**


5 B H 1 S D D 8 8 - X X X X 5 A L - X X



88: 8.8mm	No. of contacts (06-40, 44, 50, 60, 64)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective Au SA:5u" SB:10u" SC:20u" SD:30u"	5:W/O peg & W/O ejector	A:Tray	RoHS	 00: Black 01: Gray, W/O 6 Pin 02: Gray, for 6 Pin
		T0:Tin Plated TE:Tin 200u"					

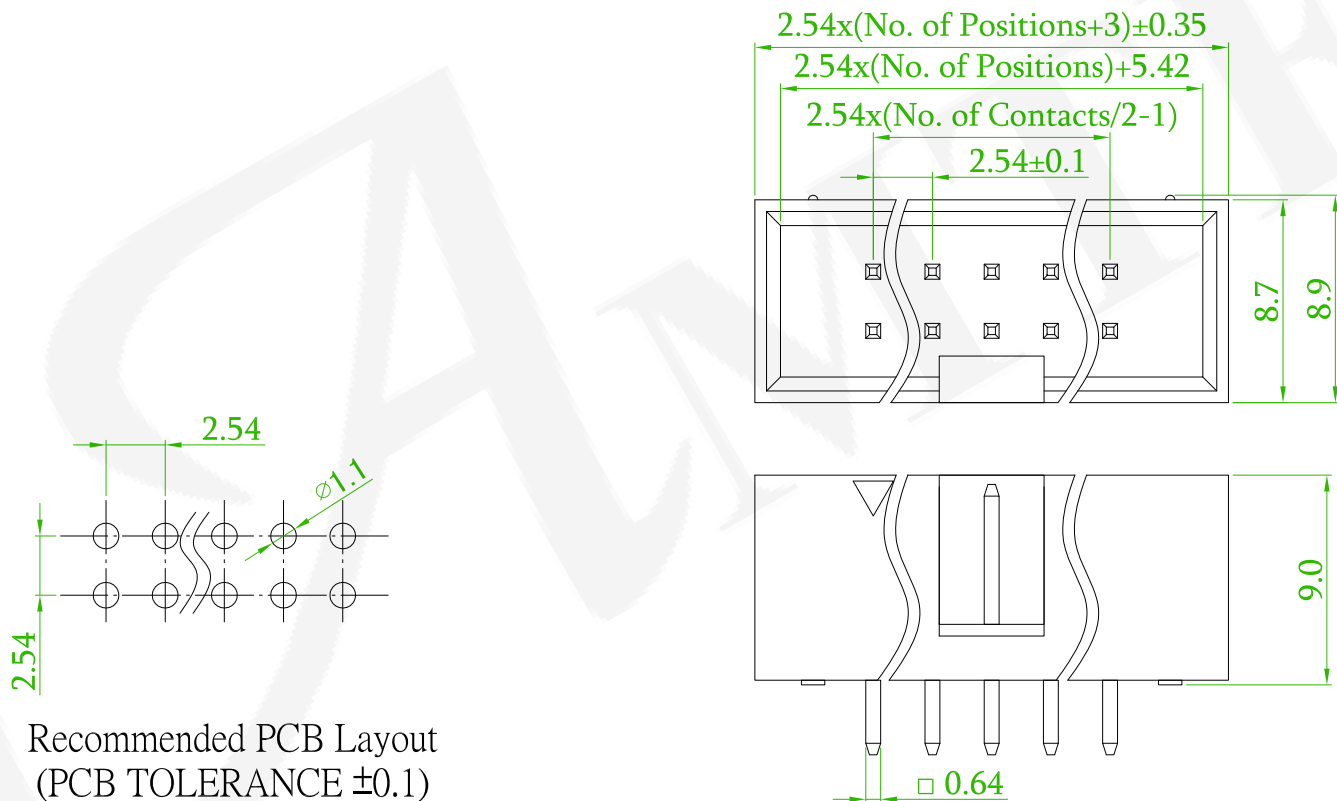

Recommended PCB Layout  
 (PCB TOLERANCE ±0.1)

Old P/N: BH1S-XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	Add a color: Gray.	Gary	2018/12/10

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm BOX HEADER V/T DIP TYPE			頁數 Page	1/1
	品號 PART NO.	5BH1SDD88-XXXX5AL-XX			繪圖 DRAWN	Gary 2017/08/07
	圖號 DRAWING NO.	GN005-GA515	版本 REV.	B	核對 CHECKED	Josh 2018/12/10
	客戶品號 CUSTOMER P/N		比例 SCALE	1 : 1	承認 APPROVED	Jason 2018/12/10
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	
		X°±3°				