

### SPECIFICATION

Current Rate: 2 AMP

Withstanding Voltage: AC 1000V for 1 Minute

Insulation Resistance: 1000M Min. at DC 500V

Contact Resistance: 30mΩ Max

Operating Temperature: -40°C~+105°C

### MATERIAL

Insulator: Polyester, UL 94V-0



Standard: PBT+30% Glass Fiber (Meet UL94V-0).

Contact: Copper Alloy.

Contact Plated: Gold or Tin over Nickel Plated.

Dimension





Pins	A	B	C
08	20.46	15.26	7.62
10	23.00	17.80	10.16
14	28.08	22.88	15.24
16	30.62	25.42	17.78
20	35.70	30.50	22.86
26	43.32	38.12	30.48
30	48.40	43.20	35.56
34	53.48	48.28	40.64
40	61.10	55.90	48.26
50	73.80	68.60	60.96

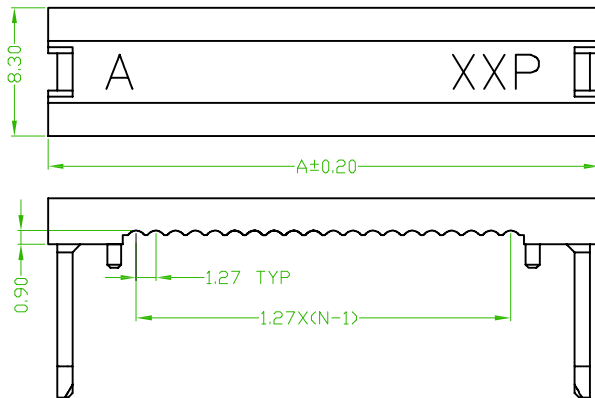


### ORDER INFORMATION

[www.esto-gruppe.de](http://www.esto-gruppe.de)

Standard Recommend

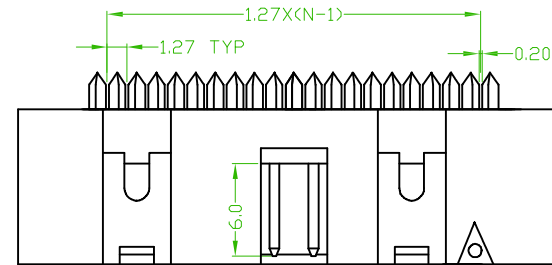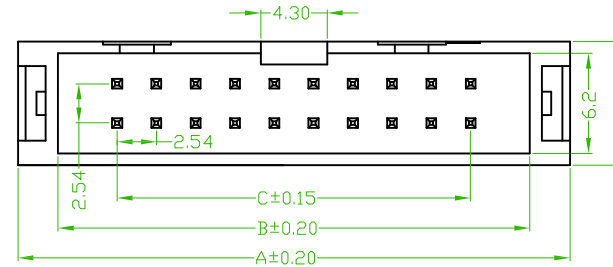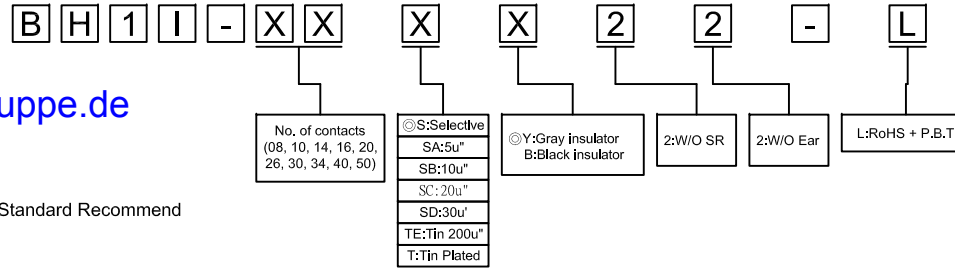

 糧德企業有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2268-8036 FAX: 886-2-2268-8035	品名 TITLE	BOX HEADER 2.54mm IDC TYPE				
	品號 PART NO.	BH1I-XX-2-L			日期 DATE	2010/10/26
	圖號 DRAWING NO.	BH1I-XX-2-L	版本 REV.	A	繪圖 DRAWN	Sinnys
	客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	Yvonne
	公差 TOLERANCE	.X ±0.25 .XX ±0.13	單位 UNIT	mm	核准 APPROVED	James

AREA	REV.	DESCRIPTION	DATE