





SPECIFICATION

Current Rate:3 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric voltage:1000V AC for one minute
 Operation Temperature:-40 °C to +105 °C


MATERIAL

Insulator:Polyester,UL 94V-0
 Contact Pin:Copper Alloy

ORDER INFORMATION

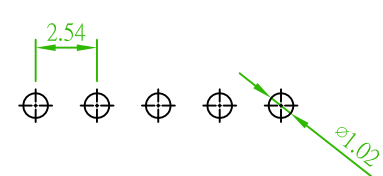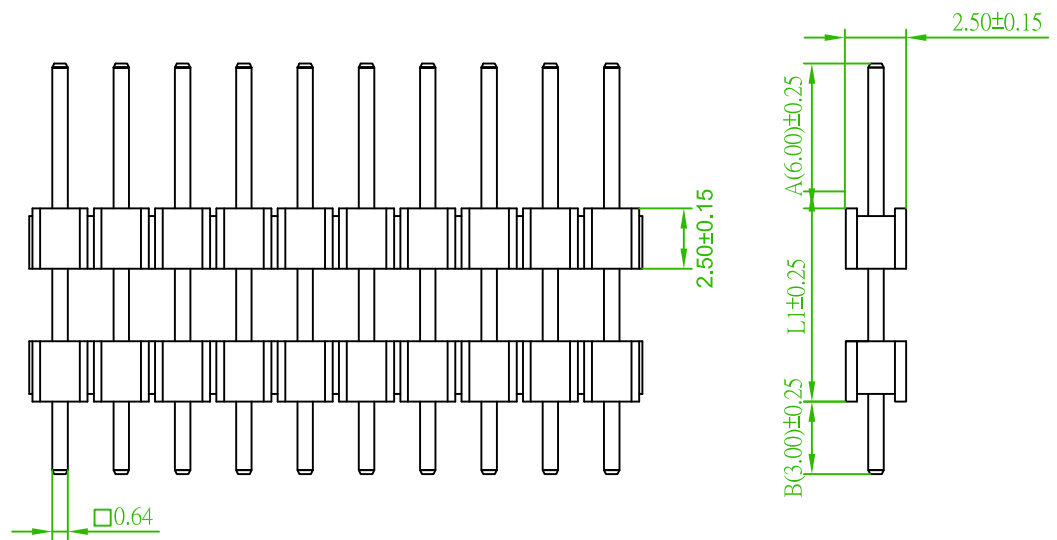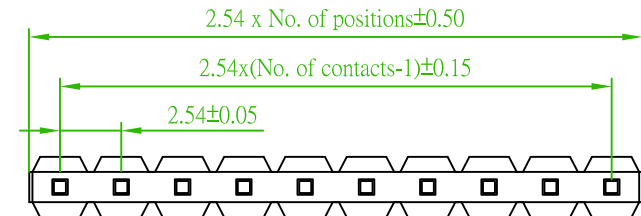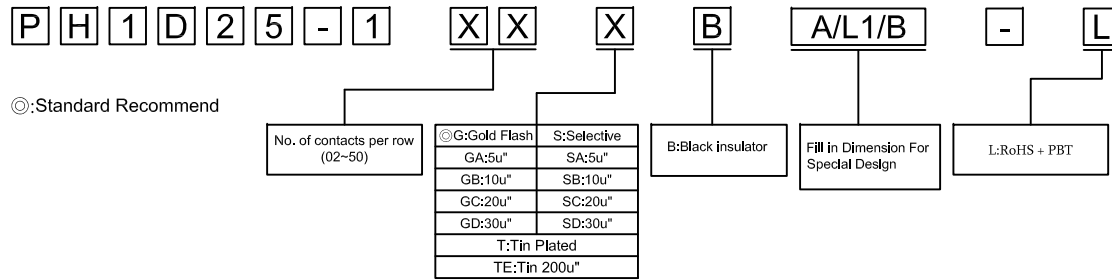

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL:886-2-2268-8036 FAX:886-2-2268-8035	品名 TITLE	PIN HEADER 2.54mm STACK STRAIGHT TYPE PLASTIC HEIGHT 2.5mm				
	品號 PART NO.	PH1D25-1XX-L			日期 DATE	2012/10/30
	圖號 DRAWING NO.	PH1D25-1XX-L	版本 REV.	A	繪圖 DRAWN	Jeff
	客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	Davis
	公差 TOLERANCE	.X ±0.35 .XX ±0.25	單位 UNIT	mm	核准 APPROVED	John

AREA	REV.	DESCRIPTION	DATE