

- Push-Pull-Verriegelung
- 3 – 5-polig
- Schutzart IP67
- Lötanschluss
- Durchmesser 9,5 mm



Bezeichnung	Maßzeichnung	Polzahl	Kabeldurchlass	Bestell-Nr.
Kabelstecker		3		99 4705 00 03
		4	3–4 mm	99 4709 00 04
		5		99 4713 00 05



Kabeldose		3		99 4706 00 03
		4	3–4 mm	99 4710 00 04
		5		99 4714 00 05



Flanschstecker		3		09 4707 00 03
		4	-	09 4711 00 04
		5		09 4715 00 05



Flanschdose		3		09 4708 00 03
		4	-	09 4712 00 04
		5		09 4716 00 05




Technische Daten

Polzahl	3	4	5
Anschlussquerschnitt	max. 0,14 mm ² (max. AWG 26)		
Mechanische Lebensdauer	> 1000 Steckzyklen		
Grenztemperatur	– 40 °C / + 80 °C		
Bemessungsspannung	125 V		
Verschmutzungsgrad	2		
Bemessungsstrom (40°C)	1 A		
Kontaktoberfläche	Au (Gold)		
Material Gehäuse	PA		


Einzelteildarstellung

Kabelsteckverbinder

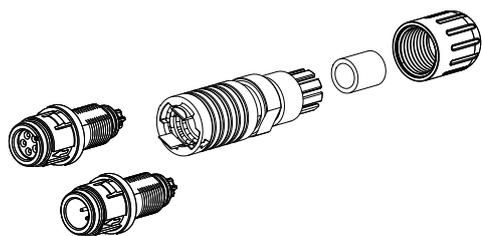

Buchseinsatz
Steckereinsatz
Verriegelungseinheit
Dichtring
Druckschraube

Flanschsteckverbinder



Flanschdose
Flanschstecker
Flachdichtung
Sechskantmutter

Polbilder Stifteinsatz (Steckseite)

3 pol



4 pol



5 pol



Polbilder Buchseneinsatz (Steckseite)



Montageausschnitt

