

SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -25 °C to +85 °C





MATERIAL

Insulator: P.B.T, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 P H 1 R D A 2 5 - 1 X X X X N N X L - A B C - 0 0

1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0:Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N:Non Type N:W/O Peg	L:RoHS+P.B.T X:Box B:Bag C:Tube With Cap	EX:060030033 A:6.0 B:3.0 C:3.9
--------------	--------------------------------	--------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------	-------------------------	---------------------------------------------------	-----------------------------------------

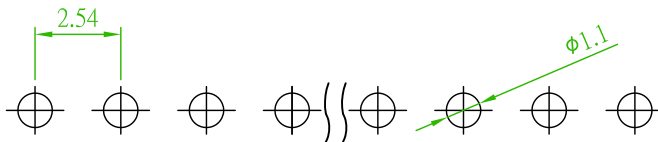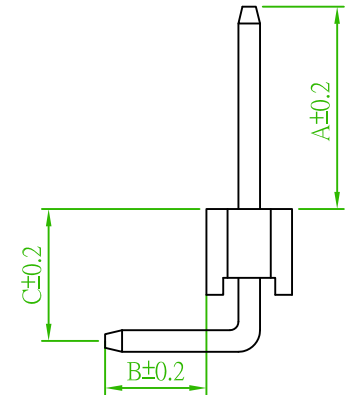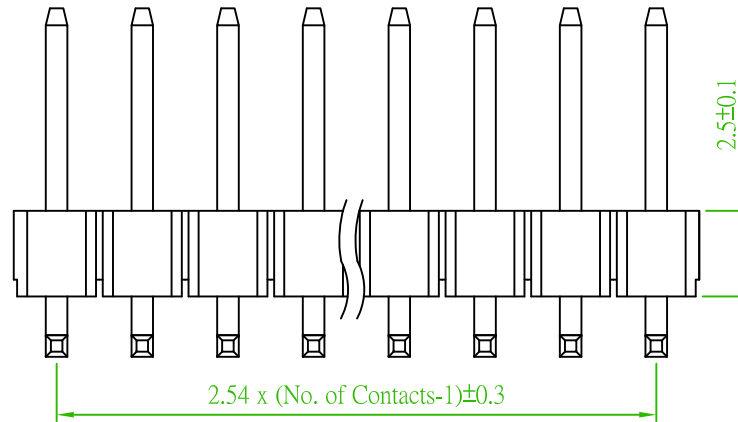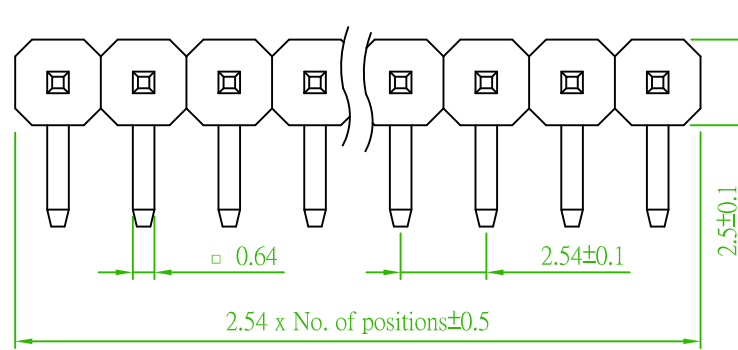

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No. :PH1RD25-1XX-L

REV.	Modify order information	B	2017/01/25 Gary
	ECN NO. OR DESCRIPTION	REVISED	DATE

Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm S/R R/A DIP TYPE			頁數 Page	1/1
品號 PART NO.	5PH1RDA25-1XXXXNXXL -XXXXXXXXXX-00			繪圖 DRAWN	Mia 2015/08/20
圖號 DRAWING NO.	GN016-GA141	版本 REV.	B	核對 CHECKED	John 2015/08/20
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/20
公差 TOLERANCE	.X ±0.35 .XX ±0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION