

NOTE △E

Contact: Brass

Plated: Ni 30u" Min. under plated over all,
Au gold flash plated on the contact area. △B

Wire: Application 20~26 #AWG, Insulation O.D 1.5mm Max

Packing: 10K pcs/Reel △C

ORDER INFORMATION

3 2 B R - S 0 0 M 0 0 0 2

Brass


S0:Selective

M:Male

AMTEK 糧德

2023.02.08

Released DCC

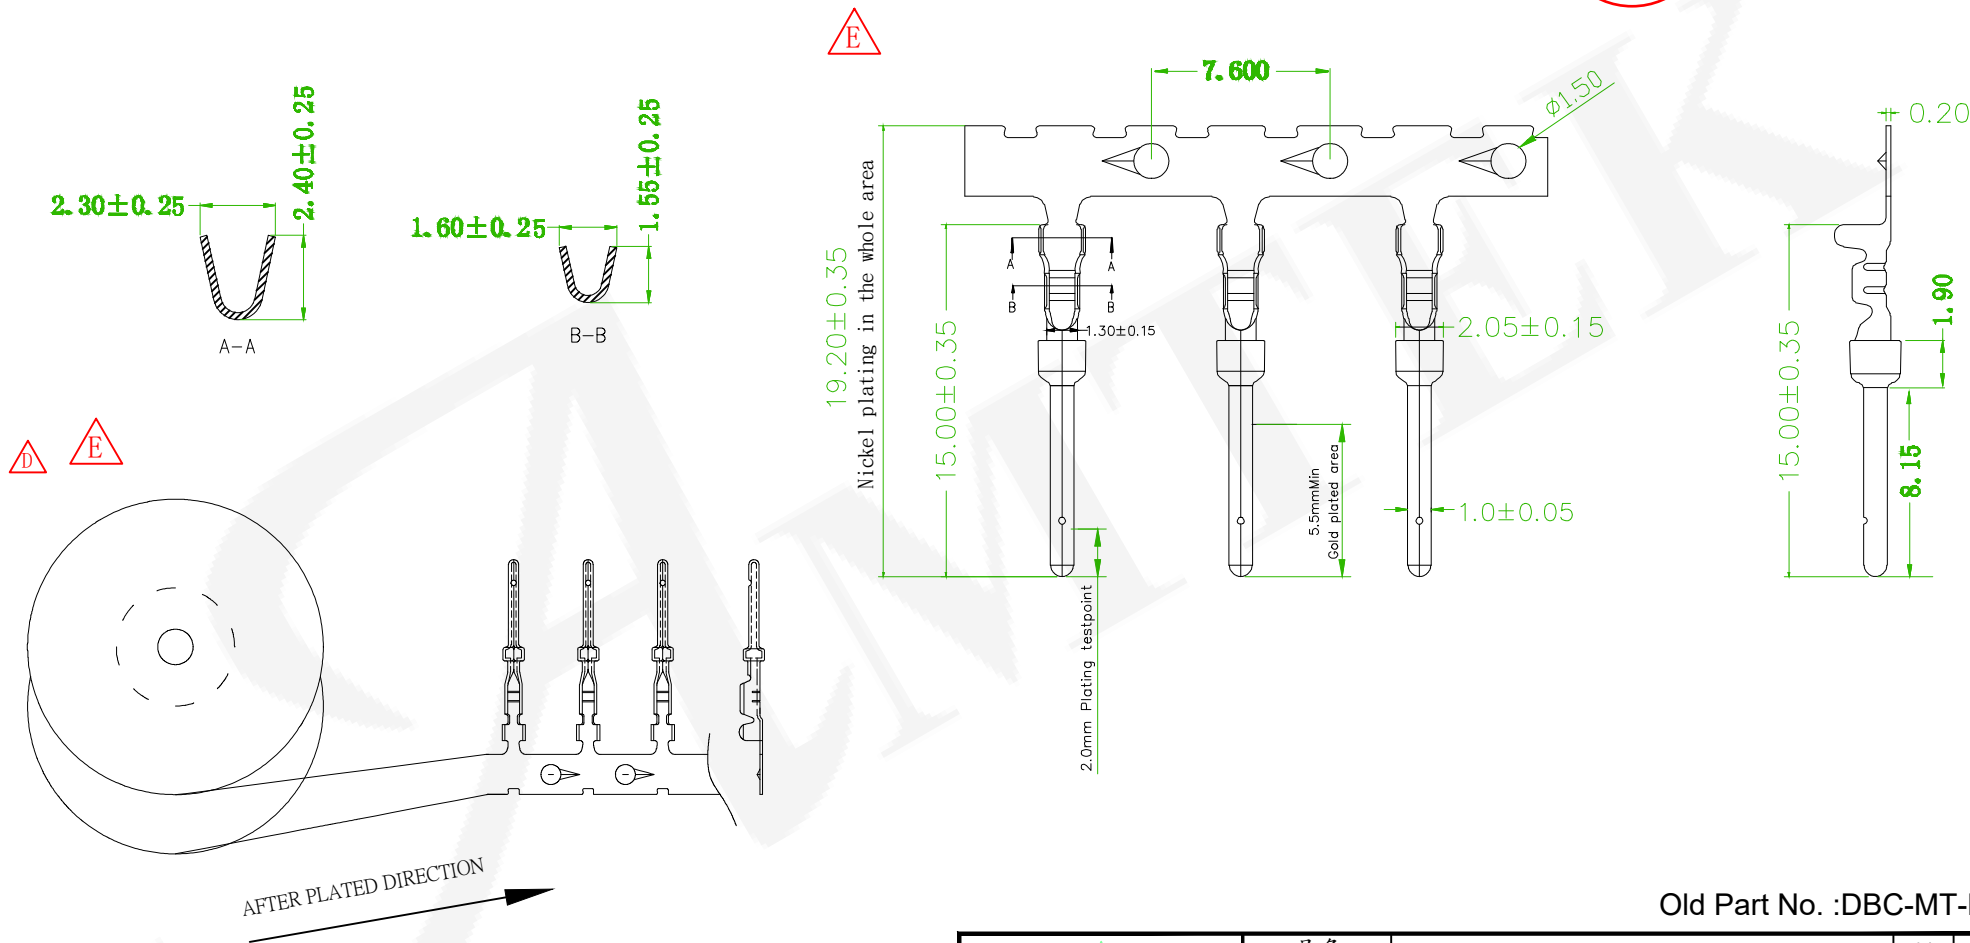

Old Part No. :DBC-MT-L

△E x4	ECN NO.: 211220 Revise the Drawing	Rex	2023/01/18
△D	Add the after plated direction	Tim	2022/09/12
△C	ECN NO.: 210402 Revise the SPQ	Benson	2021/05/11
△B	Revised the drawing	Mia	2016/08/11
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	D-SUB CRIMP TYPE MALE TERMINAL				頁數 Page	1/1
品號 PART NO.	32BR-S00M0002				繪圖 DRAWN	Mia 2016/05/30
圖號 DRAWING NO.	GN010-BN534	版本 REV.	E	核對 CHECKED	Wanling 2016/05/30	
客戶品號 CUSTOMER P/N	△	比例 SCALE	None	承認 APPROVED	John 2016/05/30	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.XXX ± 0.15 X ° ± 2°	單位 UNIT	mm	THIRD ANGLE PROJECTION	