

NOTE ⚠
Contact: Brass
Plated: Ni 30u" Min. under plated over all, ⚠
Au gold flash plated on the contact area.
Wire: Application 20~26 #AWG, Insulation O.D 1.5mm Max ⚠
Packing: 10K pcs/Reel ⚠

ORDER INFORMATION

3

2

B

R

-

S

0

0

F

0

0

0

2



Brass

S0:Selective

F:Female



AMTEK 耀德
2023.03.06
Released DCC

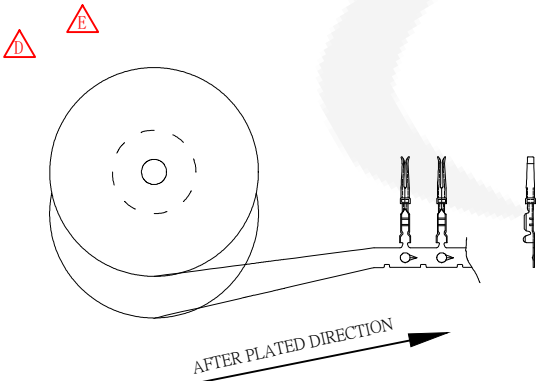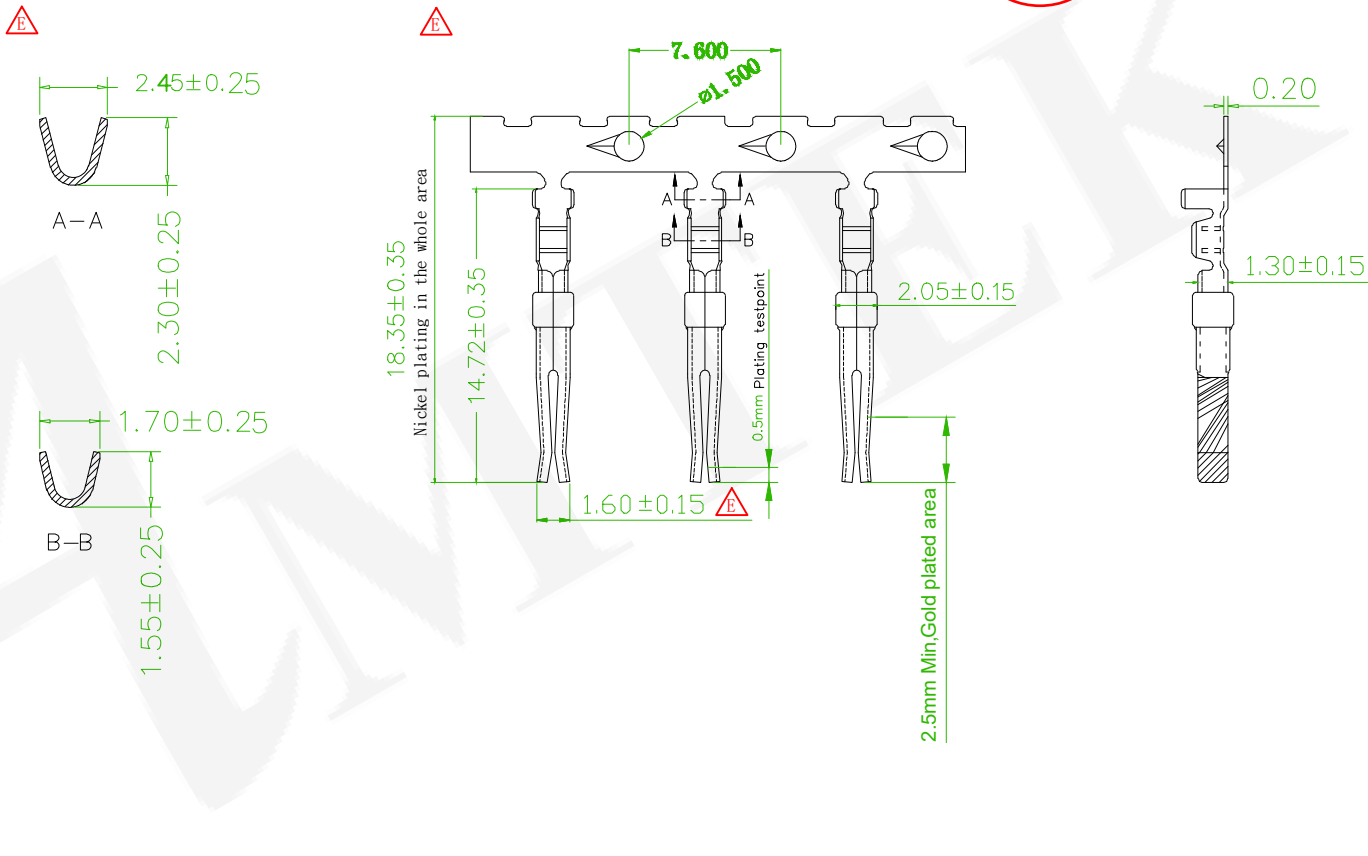

Old Part No. :DBC-FT-L

⚠ x4	ECN NO.: 221220 Revise the Drawing	Rex	2023/01/18
⚠	Add the after plated direction	Tim	2022/09/12
⚠	ECN NO.: 210402 Revise the SPQ	Benson	2021/05/11
⚠	Revised the drawing	Mia	2016/08/11
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	D-SUB CRIMP TYPE FEMALE TERMINAL				頁數 Page	1/1
品號 PART NO.	32BR-S00F0002				繪圖 DRAWN	Mia 2016/05/30
圖號 DRAWING NO.	GN010-BN532	版本 REV.	E	核對 CHECKED	Wanling 2016/05/30	
客戶品號 CUSTOMER P/N	⚠	比例 SCALE	None	承認 APPROVED	John 2016/05/30	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.XXX ± 0.15 X ° ± 2°	單位 UNIT	mm	THIRD ANGLE PROJECTION	