



Specifications

Current Rating: 3A AC,DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Temperature Range: -40°C ~ +105°C


Material

Insulator: Nylon 6T, UL94V-0
 Contact: Copper Alloy

ORDER INFORMATION

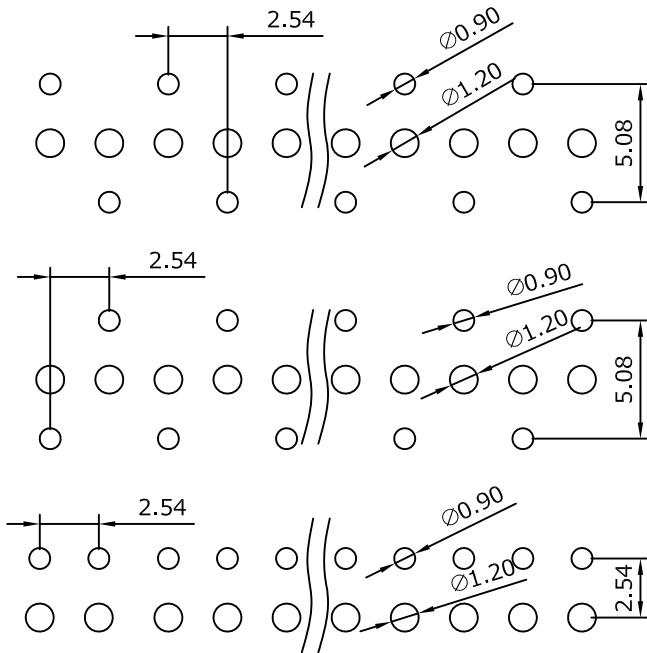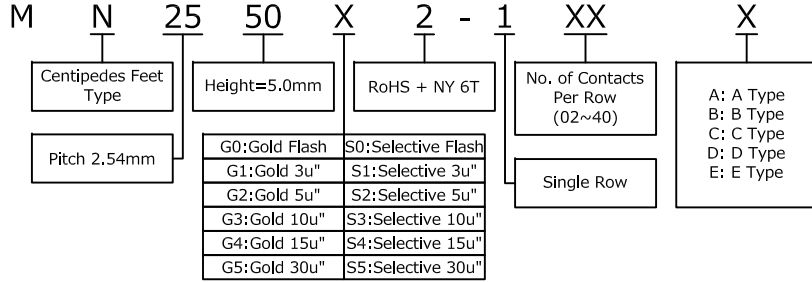

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

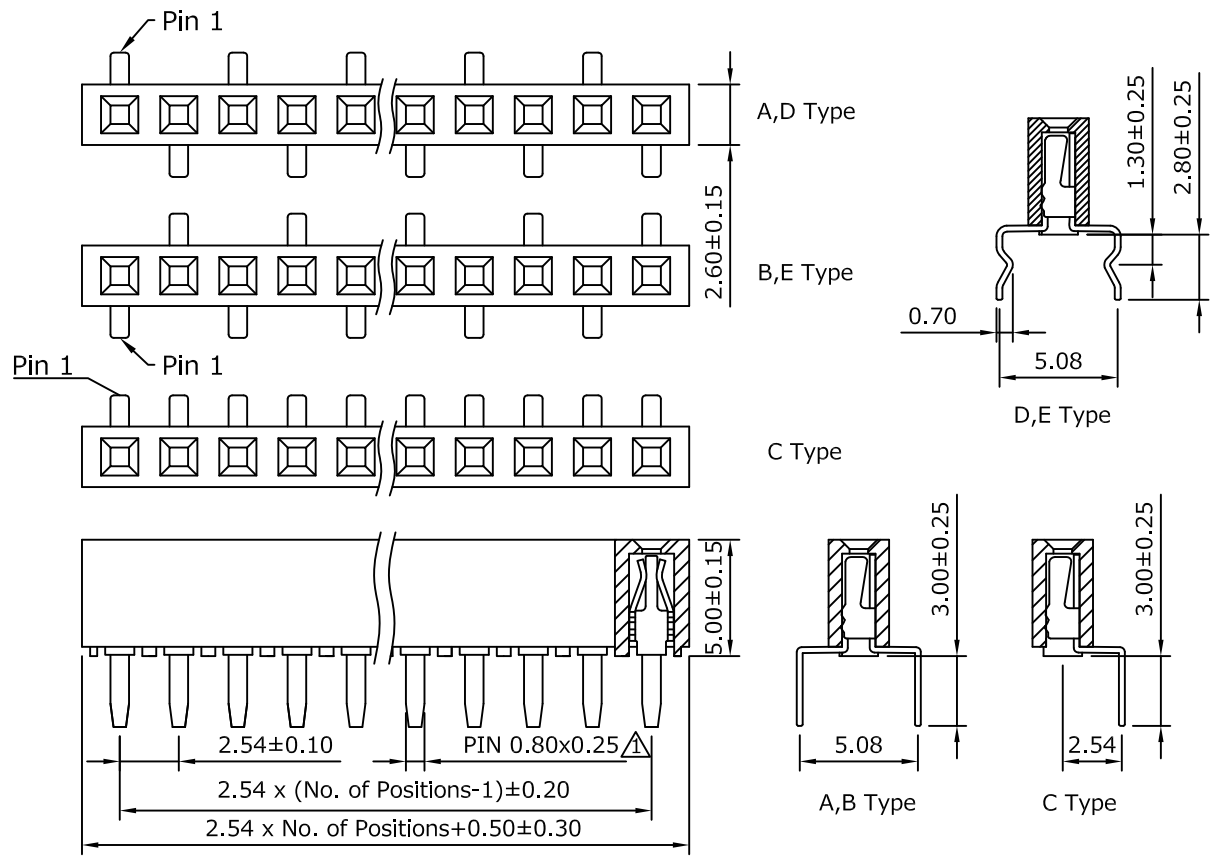

			<p>Morecrafts Tel:+886-2-2966-1326 Fax:+886-2-2966-1352</p>	PART NO.	MN2550X2-1XXX	DATE	2007/05/11
				DRAWING NO.	MN2550X2-1XXX	DRAWN	Sayid
				CUSTOMER P/N		APPROVED	Max
△	Modified dim. from 0.70x0.25 to 0.80x0.25	2014/11/26					
REV.	DESCRIPTION	DATE	TITLE: Female Header 2.54mm Plastic Height 5.0mm	REV. A	TOLERANCE .X ±0.25 .XX ±0.20	SCALE 1:1	UNIT mm