

Specifications




Current Rating: 3A AC,DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Temperature Range: -40°C ~ +105°C

Material

Insulator: P.B.T, UL94V-0
 Contact: Copper Alloy

ORDER INFORMATION

M	R	25	50	X	1	-	1	XX
Right Angle Type	Height=5.0mm	Pitch 2.54mm		RoHS + P.B.T	G0:Gold Flash G1:Gold 3u" G2:Gold 5u" G3:Gold 10u" G4:Gold 15u" G5:Gold 30u"		S0:Selective Flash S1:Selective 3u" S2:Selective 5u" S3:Selective 10u" S4:Selective 15u" S5:Selective 30u"	No. of Contacts Per Row (02~40) Single Row

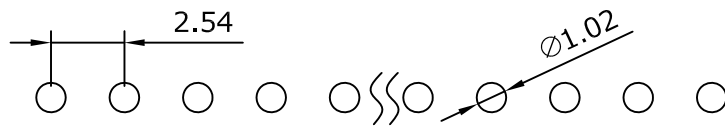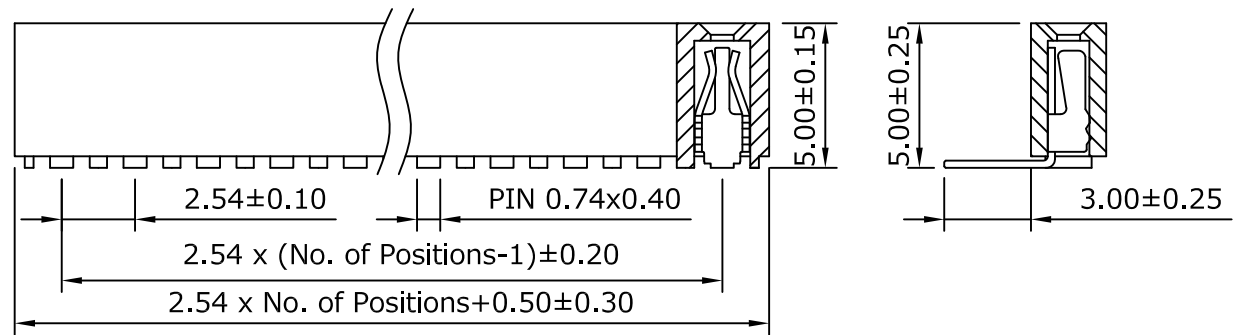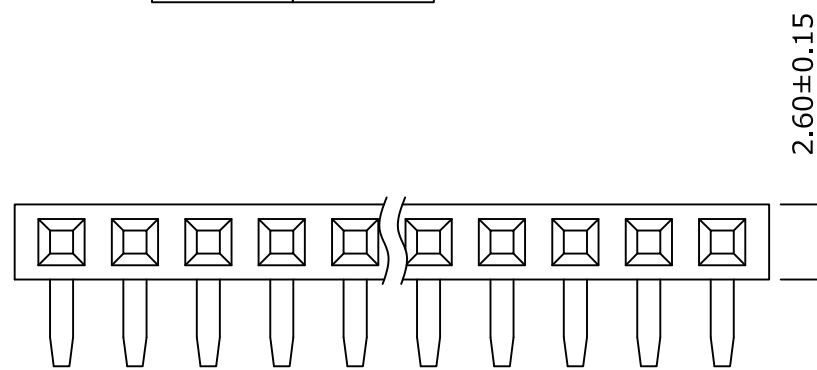

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

			<p>Morecrafts Tel:+886-2-2966-1326 Fax:+886-2-2966-1352</p>	品號 PART NO.	MR2550X1-1XX	日期 DATA	2006/04/29			
				圖號 DRAWING NO.	MR2550X1-1XX	繪圖 DRAWN	Sayid			
				客戶品號 CUSTOMER P/N		核對 APPROVED	Max			
REV.	DESCRIPTION	DATA	TITLE: Female Header 2.54mm Plastic Height 5.0mm	REV. A	公差 TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	單位 UNIT	mm