
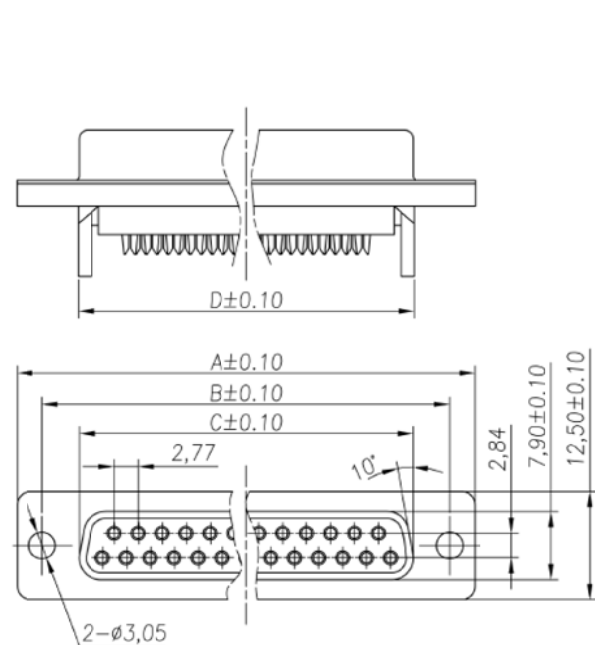

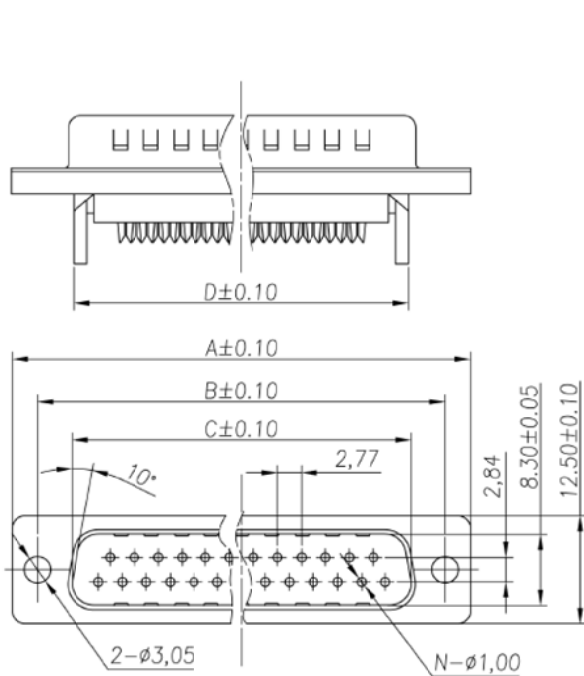


Specifications:

Current Rating: 5 AMPS
 Contact Resistance: 25mΩ max.
 Insulator Resistance: 1000MΩ min at DC 500V
 Dielectric Withstanding Voltage: 1000V for 1 Minute
 Operating Temperature: -55°C ~ +105°C
 Contact: Brass
 Housing: PBT+30% Glass Fiber(UL94V-0)
 Shell: SPCC

ORDER INFORMATION

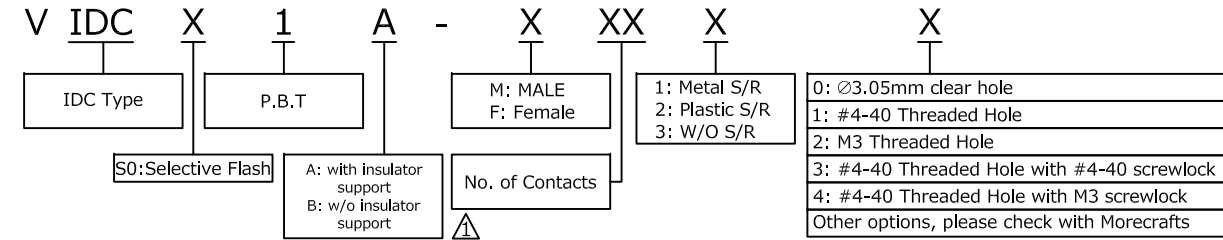



DIM	PIN	DB9P	DB15P	DB25P	DB37P
A		30.80	39.20	53.05	69.40
B		25.00	33.30	47.05	63.50
C		17.00	25.25	38.96	55.42
D		16.45	24.95	38.65	55.00







PART NO.	VIDCX1A-XXXX	DRAWN	Andrew
DRAWING NO.	VIDCX1A-XXXX	CHECKED	Claudia
DATE	2015/04/22	APPROVED	Brian

Amended ORDER INFORMATION 2016/2/2

TITLE:	D-SUB IDC TYPE	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.	DESCRIPTION	DATE
--------	----------------	------	----	-----------	-----------------------	-------	-----	------	----	-----	-------------	------

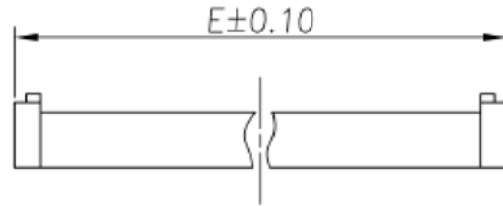

DIM \ PIN	DB9Pin	DB15Pin	DB25Pin	DB37Pin
E	15.05	23.65	37.05	53.70
F	18.80	26.90	40.50	56.65

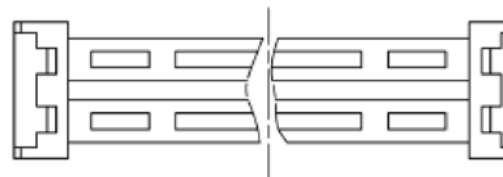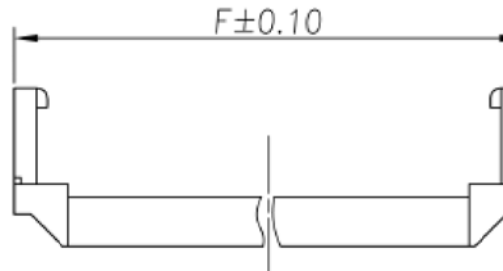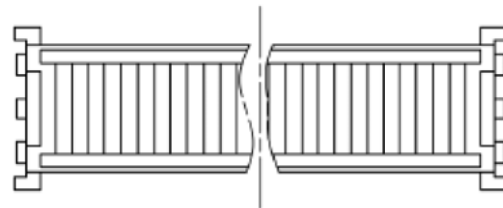

M Morecrafts Technology
 TEL: +886-2-2966-1326
 FAX: +886-2-2966-1352
 www.morecrafts.com.tw

PART NO.	VIDCX1A-XXXX	DRAWN	Andrew
DRAWING NO.	VIDCX1A-XXXX	CHECKED	Claudia
DATE	2015/04/22	APPROVED	Brian

TITLE:	D-SUB IDC TYPE	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.		DESCRIPTION		DATE	
--------	----------------	------	----	-----------	-----------------------	-------	-----	------	----	-----	--	-------------	--	------	--