
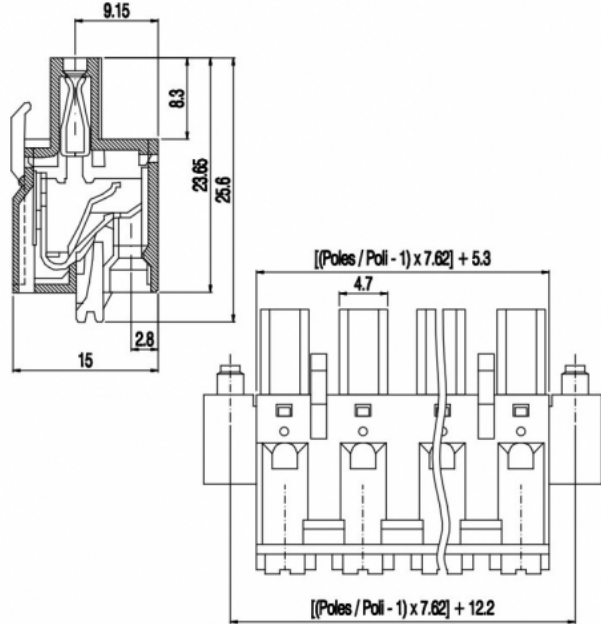


# SHM\_\_-7,62-K

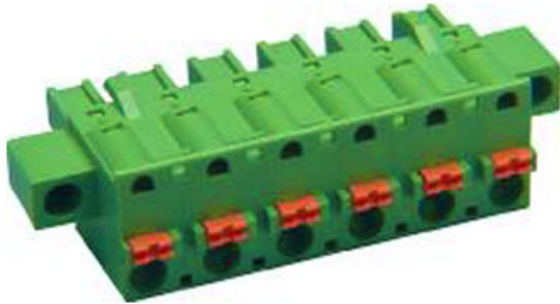

### GENERAL INFORMATION

pitch	7,62 mm
Height	15 mm
Depth	23.65 mm
Dimensional class	Media
Wire section	2.5 mm <sup>2</sup> / 14 AWG
Clamp opening size	-
Wire stripping	max 10 mm
Operating temperature	-40 ÷ +105 °C

### ELECTRICAL CHARACTERISTICS

Current	15 A
Voltage	500 V
impulse voltage	6 kV

### MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

### APPROVALS DATA



Current	-	-	<b>UL 1059</b>
Voltage	-	-	11 A factory / 11 A field
Wire section	-	-	300V (B,D) V
Torque	-	-	14 AWG
FILE	-	-	-
			E178356

### MATERIALS

Housing	PA - UL 94 V0
Screw	-

Clamp  
Terminal

-  
Tin-plated copper alloy

**COLOURS**

Standard



On request

**POLES**

- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12

**NAME**

- SHM02-7,62-K
- SHM03-7,62-K
- SHM04-7,62-K
- SHM05-7,62-K
- SHM06-7,62-K
- SHM07-7,62-K
- SHM08-7,62-K
- SHM09-7,62-K
- SHM10-7,62-K
- SHM11-7,62-K
- SHM12-7,62-K

**3D FILE**

- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product
- File not available for this product